


8 7 6 5 4 3 2 1

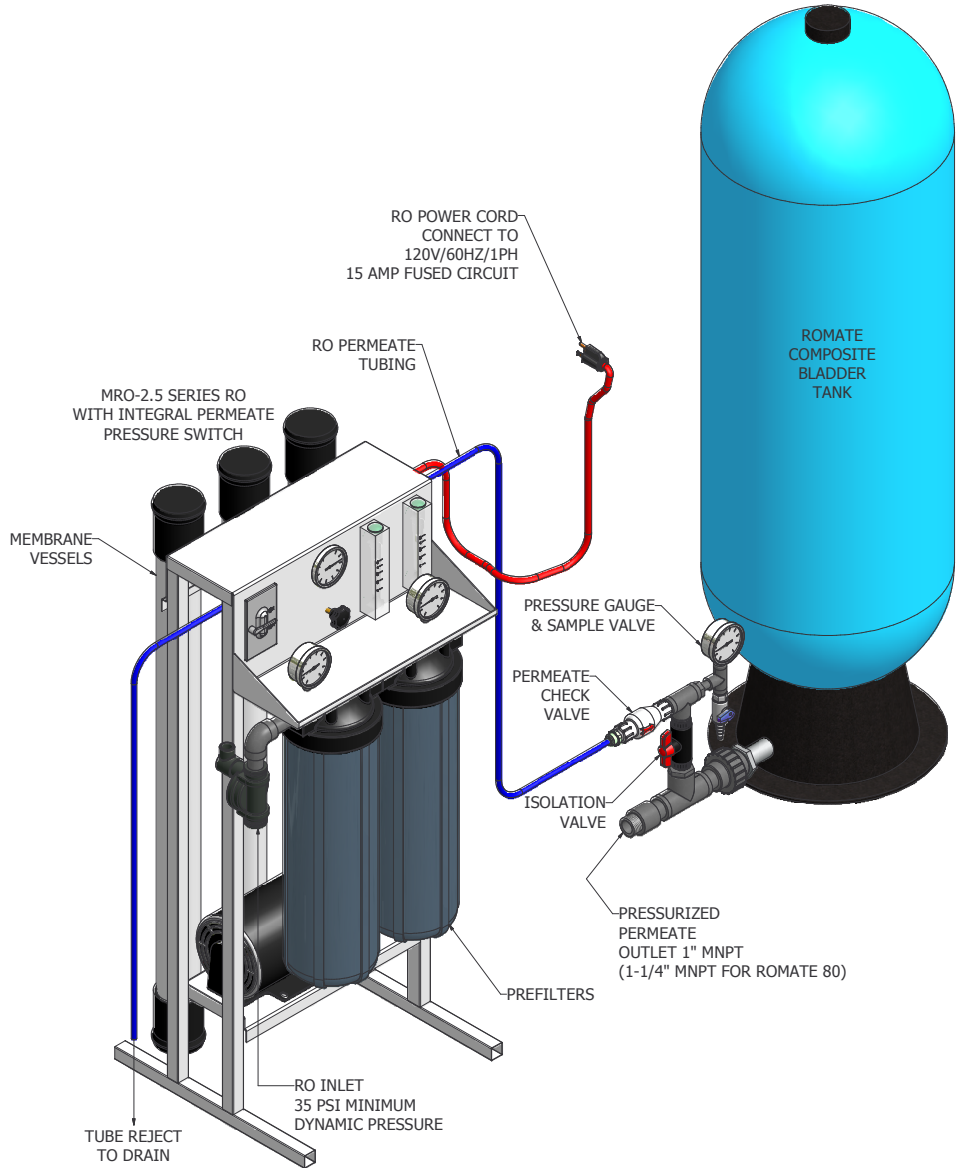

2.5" SERIES REVERSE OSMOSIS UNITS						
MODEL	DIMENSION L x W x H	PIPING CONN			MOTOR	MAX. GPD @ 77° F
		INLET	PERMEATE	REJECT		
MRO-200	22" x 7" x 31"	1/4" TUBE	1/4" TUBE	1/4" TUBE	N/A	200
MRO-300	28" x 7" x 33"	3/8" TUBE	3/8" TUBE	1/4" TUBE	N/A	300
MRO-500	20" x 14" x 27"	3/4" NPT	3/8" TUBE	3/8" TUBE	1/3 HP	500
MRO-1000	20" x 14" x 27"	3/4" NPT	3/8" TUBE	3/8" TUBE	1/2 HP	1000
MRO-1500	23" x 19" x 46"	3/4" NPT	3/8" TUBE	3/8" TUBE	3/4 HP	1500
MRO-2500	23" x 19" x 46"	3/4" NPT	3/8" TUBE	3/8" TUBE	3/4 HP	2500

RO BLADDER TANK SPECIFICATIONS FRP CONSTRUCTION NSF/FDA LISTED		
MODEL	DIA X HEIGHT	CAPACITY @ 50 PSI
ROMATE 15	16" x 27"	7 GAL.
ROMATE 20	16" x 33"	10 GAL.
ROMATE 30	16" x 44"	15 GAL.
ROMATE 40	16" x 57"	20 GAL.
ROMATE 80	25" x 56"	40 GAL.

NOTE: DIRECT FEED BLADDER TANK INCLUDES ALL PIPING, VALVES, ETC. SHOWN FOR COMPLETE OPERATIONAL SYSTEM.

REVISIONS				MARLO INCORPORATED	MRO-2.5 SERIES RO WITH DIRECT FEED BLADDER TANK		
NO.	DATE	BY	REMARKS		TRAC	DEC	FILE ID.

SCALE	SHEET	1	OF	1
DATE	DRAWING NO.	5-242-1		
ENTR	DATE	12/22/2009		

8 7 6 5 4 3 2 1